




Seating Inc. | 60 N. State Street | PO Box 898 | Nunda, NY 14517 | 800.468.2475 | sales@seatinginc.com

M20 Mechanism Instructions

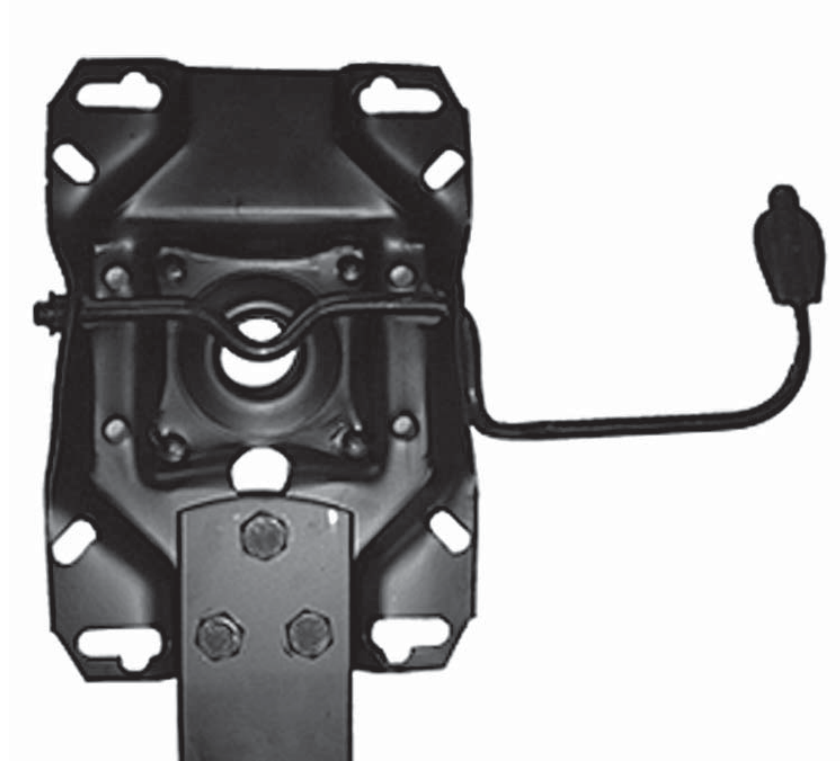

- ① **Pneumatic Lift Adjustment:**
Lift lever toward seat to activate height adjustment.

All adjustments are made while seated.



M20 Assembly Instructions

- ① Place Base and Caster Assembly (Figure A) on carpeted floor.
- ② Insert Pneumatic Cylinder (Figure B) Into Base (Figure A1) by inserting tapered end (B1).
- ③ Place the seat assembly on the Pneumatic Cylinder (Figure B) by inserting the Pneumatic Cylinder Activator (B2) into the opening (C1) of the mechanism (*Figure C).
*Actual M20 mechanism not shown, opening is similar.
- ④ Apply pressure for a secure fit.



Figure A



Figure B



*Figure C