

Mechanism Instructions - Q28

Seating Inc.

P.O. Box 898 ♦ 60 State Street ♦ Nunda, NY 14517 ♦ Tel: 800•468•2475 ♦ seatinginc.com

Tilt Resistance - (There is a hand wheel under the front of the mechanism that can't be seen in this picture) Turn the Hand Wheel counter clockwise to increase the tension for heavier people, clockwise to decrease the tension for lighter people.



Seat Tilt Lock out

Move the seat tilt paddle up to allow the chair to rock. Rock back in the chair while rotating lever downward to allow forward tilting, or upward to lock out negative seat tilt.

Seat Tilt

This paddle adjusts seat and backrest angle as a unit and allows chair to rock. Lift paddle to allow chair to "rock". Push paddle down to lock the chair in any desired position.


Pneumatic Lift Adjustment

Lift the tab up to adjust seat height

Backrest Angle Adjustment

Pull up on the tab to make adjustments to backrest angle or to allow backrest to move with your body. Push Paddle Down to lock.

Q28
Multi Function Tilter

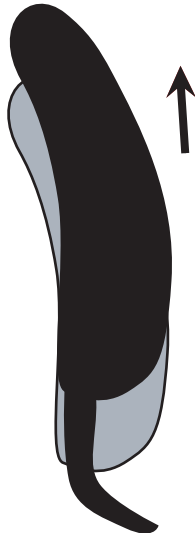

Quick Set Back Height Adjustment

Step 1

Release Back Height

While sitting in the chair put both hands behind you under the back cushion of the chair. Pull the back cushion up to it's highest possible position - then let go and allow it to drop all the way down. Push gently down on the cushion to make sure it is has returned all the way to the bottom.

Step 2

Back Height Adjustment

While sitting in the chair put both hands behind you under the back cushion of the chair and pull up slowly until you hear the mechanism click. Let go and test the back height. Repeat the procedure until it has reached the desired height.